


4G Dash Camera

User Manual V1.0

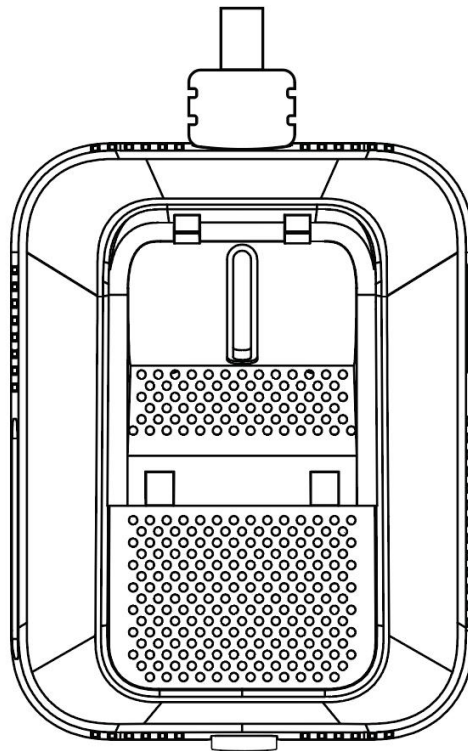

Model: AT102

Please read this manual carefully before using the product to ensure proper installation and operation. The contents of this manual are subject to change without prior notice as part of our ongoing product improvement and development efforts.

About This Manual

This manual provides instructions for the installation, configuration, operation, and maintenance of the AT102 4G Dash Camera. It also outlines important safety information and operational precautions. All text, images, diagrams, and other content contained in this manual are the property of Anyixing. No part of this publication may be reproduced, copied, translated, modified, or distributed in any form without prior written authorization from Anyixing.

Unless otherwise stated, this manual is provided for reference purposes only and does not constitute any express or implied warranty.

Intended Audience

This manual is intended for authorized installers, system integrators, fleet operators, technical support personnel, and other users responsible for the deployment and maintenance of the AT102.

Product Information

The product images, interface screenshots, and illustrations contained in this manual are provided for reference only. Actual product appearance, color, dimensions, software interfaces, and functions may vary depending on the product version and configuration. Please refer to the actual product.

Performance data, specifications, and test results referenced in this manual are obtained under controlled laboratory conditions and may vary due to hardware configurations, software versions, network environments, operating conditions, and other factors. Actual performance may differ accordingly.

To continuously improve product quality and user experience, Anyixing. reserves the right to modify product features, specifications, hardware, software, documentation, and related materials without prior notice. The latest product information shall prevail.

Trademark Statement

Anyixing is a registered trademark of Anyixing. All other trademarks, trade names, and brand names mentioned in this manual are the property of their respective owners.

Disclaimer and Limitation of Liability

To the fullest extent permitted by applicable law, the products and services described in this manual, including hardware, software, firmware, and related documentation, are provided on an "as available" basis. Anyixing. makes no express or implied warranties, including but not limited to warranties of merchantability, fitness for a particular purpose, satisfactory quality, or non-infringement of third-party rights.

Under no circumstances shall Anyixing. be liable for any indirect, incidental, special, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of data, or loss of documentation arising from the use of this product or manual.

Users acknowledge that Internet-connected devices and telematics systems may be exposed to cybersecurity risks, including unauthorized access, malware, cyberattacks, or data breaches. Anyixing. shall not be responsible for losses or damages resulting from such events but will provide reasonable technical assistance when required.

Users are solely responsible for ensuring that the product is installed and operated in compliance with all applicable laws, regulations, and industry requirements. Anyixing. assumes no liability for any misuse of the product, violation of applicable regulations, or infringement of third-party rights.

In the event of any conflict between this manual and applicable laws or regulations, the applicable laws and regulations shall prevail.

Copyright © 2026 Anyixing. All Rights Reserved.

Table of Contents

About This Manual	2
Table of Contents	4
1. Overview	6
1.1 Appearance Description	6
1.3 Packing contents	6
1.4 Specifications	7
1.5 LED indicator	9
2. Features	9
3. Functions	10
3.1 Basic Operation	10
3.2 Core Functions	10
4. Installation	11
4.1 Installation Position Regulations	11
4.2 Installation Position Recommendation	12
4.3 Installation Instructions	12
4.3.1 Installation Preparation	12
4.3.2 Wire Diagram:	14
4.3.3 Device Installation Procedure	14
5. Device Configuration	15
5.1 Connect to the Device Hotspot	15
5.2 Platform Server	16


6. Firmware Upgrade	17
7. Usage Precautions	17
7.1 Safety Warning	17
7.2 Maintenance Precautions	18
7.3 Troubleshooting	18
8. After-Sales Service Policy	19

1. Overview

The AT102 is a compact and practical video telematics device that combines 2K HD video recording with built-in GNSS positioning to provide essential vehicle monitoring and location tracking. Its streamlined design enables quick installation and reliable operation, making it well suited for everyday fleet applications.

Designed for ride-hailing, taxi, logistics, and commercial vehicles, the AT102 delivers dependable video evidence and real-time location data to improve fleet visibility and operational efficiency. Offering the right balance of performance, simplicity, and affordability, it is an ideal solution for fleets seeking reliable telematics without unnecessary complexity.

1.1 Appearance Description

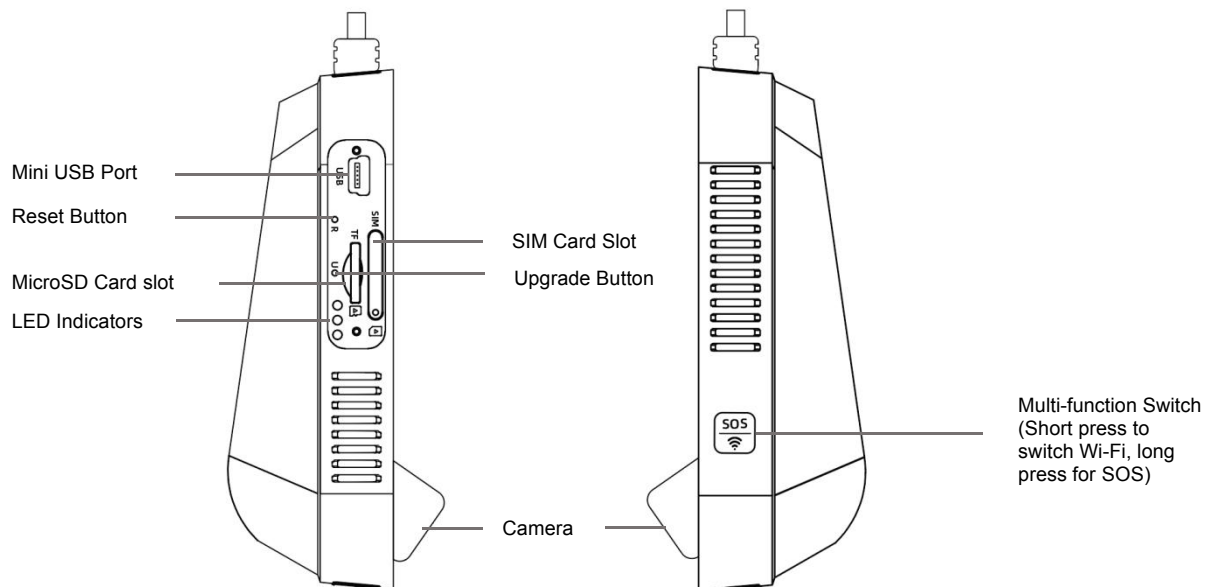

1.3 Packing contents

Package contains the following items:

Item	Name	Photo	Quantity
1.	AT102 device		1
2.	Power cable		1


3.	Card slot protective cover		1
4.	Card slot protective cover screws		2
5.	SIM card ejector		1
6.	SIM card tray		1

1.4 Specifications

General	
Operating System	Linux
Dimensions	105 * 82 * 46mm
Weight	321g
Color	Black
Power Supply	9-36VDC
Power Lost Protection	Super Capacitor provides 10-15s of safe power backup (Optional)
Operating Temperature	-20 ~ +70 °C
Operating Humidity	10%-90% Non-condensing
Hardware	
CPU	ARM Cortex-A7@900MHz
RAM	DDR2 512Mb
External Storage	1*Micro SD card, max. 256GB
G-Sensor	3 Axis Accelerometer
GNSS	Multiple Positioning Mode
SIM Card	Nano SIM
LED	Red(Record), Blue(Network), Green(GNSS)

I/O	ACC * 1, Relay * 1	
Reset Button	Support	
Upgrade Button	Support	
Multi-Function Button	Wi-Fi Switch / Panic Button	
Network		
Cellular	LTE Cat1	
Frequency Bands	LTE-FDD: B1/B3/B5/B8	CN, IN (Cat 1)
	LTE-TDD: B34/B38/B39/B40/B41	
	LTE-FDD: B1/B3/B5/B7/B8/B20/B28	EMEA (Cat 1)
	LTE-FDD: B2/B3/B4/B5/B7/B8/B28/B66	LATAM (Cat 1)
Wi-Fi	802.11b/g/n 2.4G, for configuration	
Protocol	JT/T 808-2013, JT/T 808-2019, JT/T1078-2016	
Video / Audio		
Channels	Built-in 1CH * 2K	
Video Encoding	H.264/H.265	
Audio Encoding	AAC/G.711A	
Frame Rate	25 FPS	
Microphone	Built-in	
Speaker	Built-in, 3 Watts	
Image Sensor	1/2.9", 4 megapixel CMOS Sensor	
Lens	118° FOV, 2G2P, F2.0 Aperture	
Recording Quality	Main and Sub Stream, Adjustable Resolution	
Recording Mode	ACC ON Recording, Time Lapse Recording	
Audio Control	Enable / Mute	
Voice Volume	Mute / Low / Medium / High	
Video Format	TS, MP4	
Image Format	JPG	
*Configurations may vary in different countries and regions.		

1.5 LED indicator

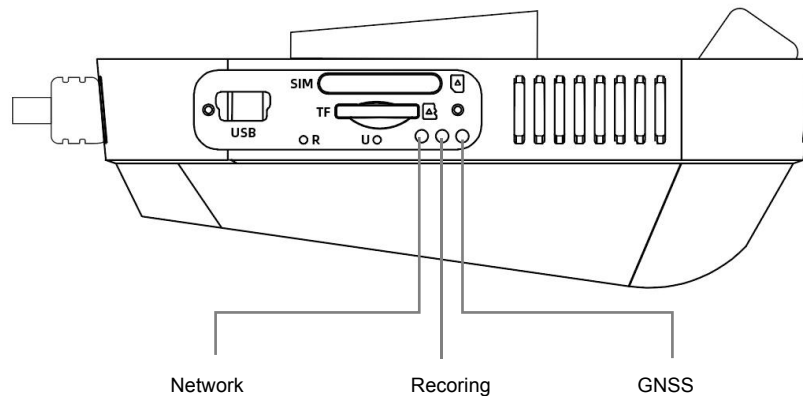

The table below shows the status of the LED:

LED	Color	Status	Meaning
Recording	Red	OFF	Power disconnected.
		Blinking	The system is running normally but not recording
		Solid ON	Video recording
Network	Blue	OFF	No network signal.
		Blinking	The network signal is available but can't connect with the platform.
		Solid ON	The network signal is available and connected with the platform.
GNSS	Green	OFF	No GPS signal.
		Blinking	There is GPS signal but can't fix position.
		Solid ON	There is GPS signal and successfully positioned.

2. Features

- Built-in 2K Camera
- Easy installation
- Built-in Mic and Speaker
- Remote Engine Cut-off
- Location Tracking
- LTE 4G High Speed Connectivity
- Lens Angle Adjustable
- Live Streaming Video

- History Video Playback & Download
- Built-in Mic and Speaker
- Panic Button
- Wi-Fi for Configuration
- OTA Firmware Update

3. Functions

3.1 Basic Operation

- Startup: When the B+, ACC, and GND power lines are correctly connected to the vehicle power system, the device will automatically power on without any manual operation.
- Shutdown: The device will automatically power off when the vehicle power supply is disconnected.
- Sleep Mode: When the vehicle ignition is turned OFF (ACC signal off), the device will stop recording and disable GNSS and other non-essential functions. The system then enters sleep mode to reduce power consumption and protect the vehicle battery.

3.2 Core Functions

Video Recording

When the vehicle ignition is turned ON, the device automatically starts recording. It captures video and audio from all connected cameras. The system supports loop recording, continuously overwriting the oldest files on the memory card when storage is full, ensuring uninterrupted recording without manual intervention.

Live Video Streaming

Through the backend platform, the device can transmit real-time audio and video data via cellular network. This allows fleet operators to monitor the vehicle and driver status remotely in real time.

Historical Video Retrieval

The platform enables users to request and download event-based or time-based video clips. Recorded files stored on the memory card can be uploaded to the cloud server for playback, analysis, and evidence review.

Position Tracking

When the vehicle ignition is turned ON, the GNSS module is activated automatically for real-time positioning. The system continuously tracks and records vehicle location data, which is transmitted to the cloud platform. Users can view both real-time and historical trip routes through the fleet management system.

4. Installation


4.1 Installation Position Regulations

Note: The following information is provided for reference only and does not constitute legal advice. Users must comply with all applicable local laws and regulations.

Dash Camera Installation Guidelines (United States)

According to regulations from the Federal Motor Carrier Safety Administration (FMCSA), in-vehicle recording devices may be installed within permitted areas on the windshield, provided they do not obstruct the driver's field of view.

The device may be installed in the area from the top of the windshield down to 8.5 inches (approximately 216 mm) below the upper edge of the windshield wiper sweep area.

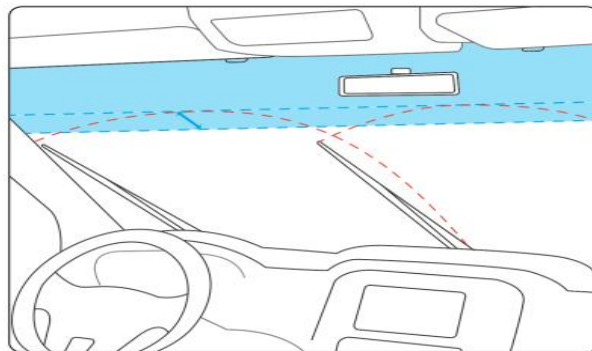


Dash Camera Installation Guidelines (United Kingdom)

To determine compliant installation positioning, the windshield is typically divided into defined visibility zones:

- Area A: A vertical zone centered on the steering wheel, 29 cm wide (35 cm for vehicles over 3.5 tons), within the area swept by the windshield wipers.
- Area B: The remaining swept windshield area excluding Area A.

The dash camera must be installed in a manner that does not obstruct the driver's field of view. Any part of the device, including the bracket and wiring, must not extend more than 10 mm into Area A, and must not extend more than 40 mm into Area B.

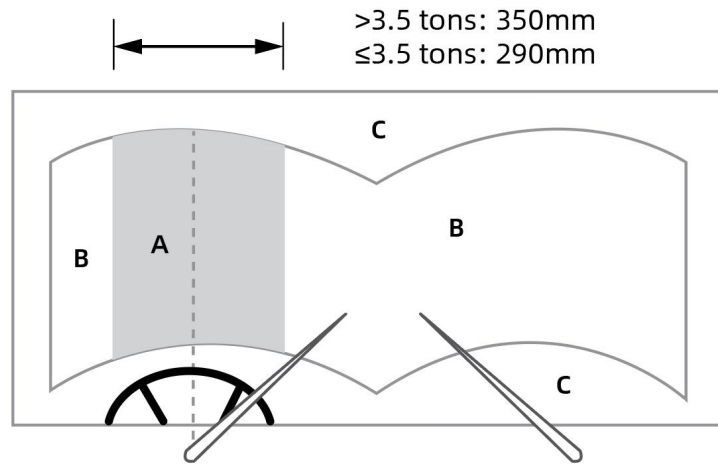

4.2 Installation Position Recommendation

It is recommended to install the device on the upper edge of the windshield, directly above the steering wheel, to ensure safe driving, the installation location should follow the principles below:

- Do not obstruct the driver's field of view.
- Do not interfere with or distract the driver during operation.
- Ensure the device is installed horizontally and remains level without tilt.

4.3 Installation Instructions

Important Notes:

- Use only the supplied accessories for installation.
- The device operates on a **DC 9–36V power supply**. Ensure the positive and negative power cables are connected correctly to avoid damage to the device or vehicle.
- After installation is completed, remove the protective film from the camera lens to ensure optimal image quality.
- Use only memory cards and SIM cards that meet the specifications outlined in this guide.
- Installation and commissioning should be performed by a qualified technician, dealer, or professional installation service provider.


4.3.1 Installation Preparation

- Verify all items in the package against the packing list and ensure no components are damaged or missing before installation.
- Prepare necessary installation tools, such as insulation tape, wiring tools, and disassembly tools.
- Check that all original vehicle functions are operating normally. If any abnormal condition is found, do not proceed with installation.
- Clean and prepare the installation area in advance to ensure proper mounting and adhesion.

The device series requires both a SIM card and a micro SD memory card to operate at full functionality. These accessories can be selected based on deployment requirements; however, the following specifications and guidelines must be strictly observed.



Memory card:

1. The device supports one **Micro SD** card slot.
1. Supported file system: **FAT32**, with a capacity **up to 256GB**.
2. Speed class requirement: Class 10 or higher, or A1 application performance class or above.
3. It is recommended to use memory cards supplied or certified by the device manufacturer to ensure optimal compatibility and system stability.
4. Insert the card following the correct orientation as indicated in the installation diagram to avoid damage.
5. To remove the card, gently press it inward until it ejects. When removing in a vehicle, handle with care to prevent the card from being lost or dropped into inaccessible areas.
6. Ensure the SIM card is not inserted into the memory card slot.
7. Memory cards are consumable components with a limited service life. It is recommended to perform quarterly testing to verify normal read/write performance and replace the card periodically to prevent data loss.
8. For long-term continuous recording in high-temperature environments, industrial-grade memory cards are recommended to ensure recording stability and reduce the risk of video corruption.

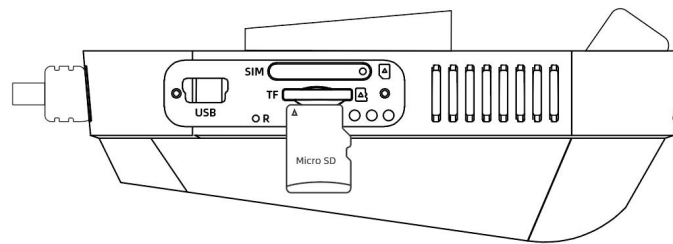


SIM card installation:

1. A **Nano SIM** card is required (refer to the installation diagram for size reference).
2. The SIM card must have an active cellular data service subscription.
3. Place the Nano SIM card into the SIM card tray in the correct orientation, then carefully insert the tray into the device until it is fully seated.
4. To remove the SIM card, use the SIM eject tool to remove the SIM card tray, then take out the SIM card from the tray.
5. For long-term operation in high-temperature environments, ceramic SIM cards are recommended to reduce the risk of deformation and communication failure caused by heat exposure.

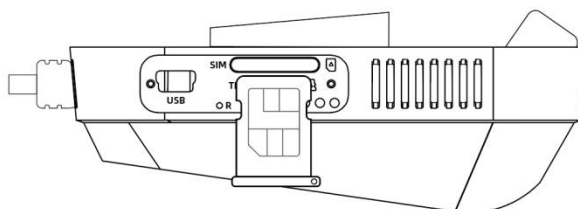

4.3.2 Wire Diagram:

The functions and connections of all wiring harnesses are illustrated in the wiring diagram below. Please verify that all required accessories are available and complete the installation according to the actual vehicle configuration.

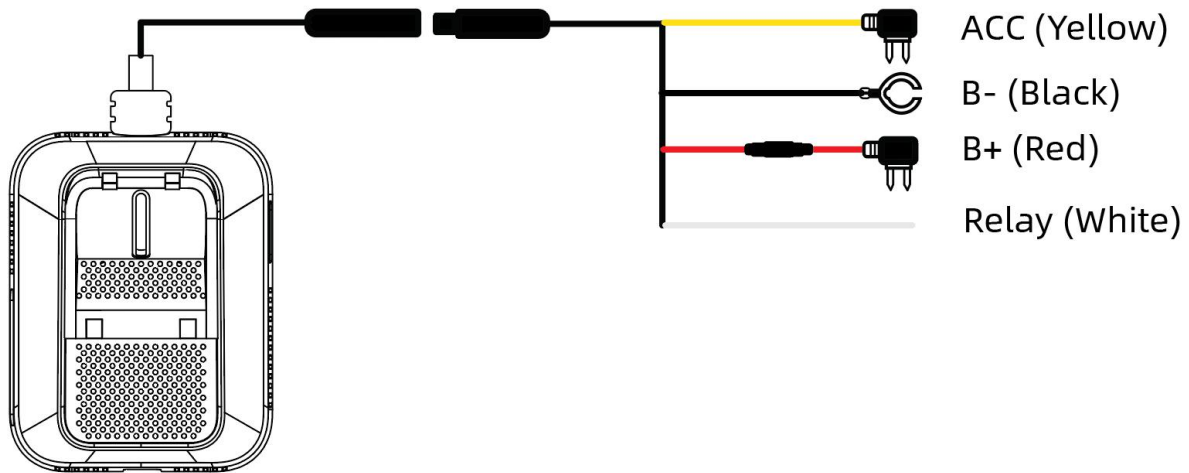


4.3.3 Device Installation Procedure

Step 1: Connect Vehicle Power

Connect the device power harness to the vehicle's B+ (constant power), ACC (ignition), and GND (ground) circuits at the fuse box. Refer to Figure 1 for the recommended wiring locations.

Step 2: Route the Power Cable


Route the power cable along the edge of the dashboard toward the upper center area of the windshield, following the path indicated by the dotted line in Figure 2. Ensure the cable is securely concealed and does not interfere with vehicle operation.

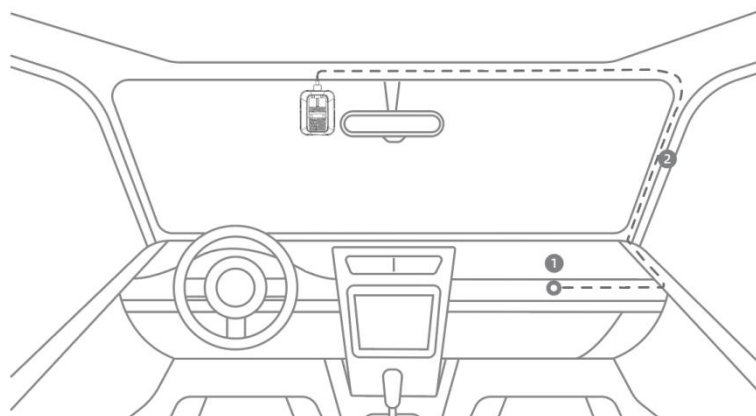

Step 3: Install the Mounting Bracket

Select an appropriate installation location on the windshield according to the recommended positions in 4.2., then:

- Clean the mounting surface thoroughly to remove any dust, grease, or residue.
- Remove the protective film from the adhesive pad on the mounting bracket.
- Firmly attach the bracket to the selected location as shown in Figure 3.
- Apply steady pressure for several seconds to ensure full adhesive contact and remove any trapped air, helping to secure the bracket permanently.

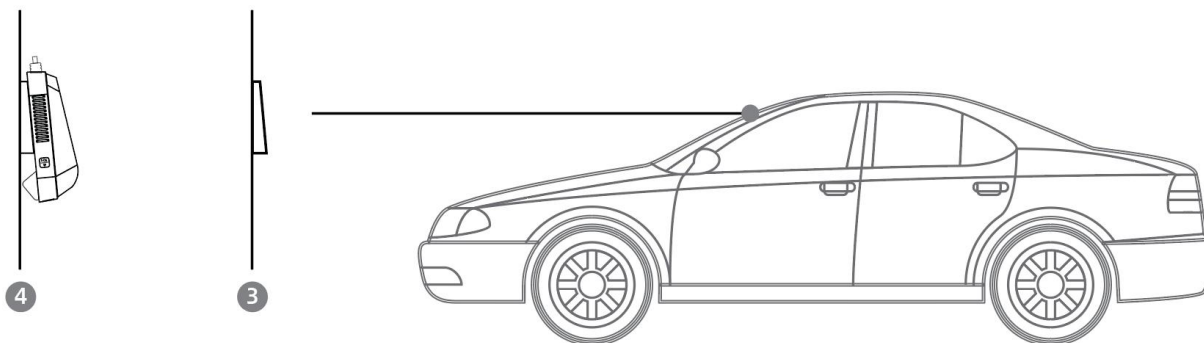

Step 4: Install and Adjust the Device

Attach the device to the mounting bracket and adjust the forward-facing camera to ensure it is level and aligned with the road ahead, as shown in Figure 4.

After the camera position has been verified:

- Connect the power cable to the device.
- Confirm that the device powers on correctly and that the camera view is properly aligned.

5. Device Configuration

5.1 Connect to the Device Hotspot


The device's Wi-Fi hotspot is enabled by default in AP (Access Point) Mode. If Wi-Fi has been disabled, briefly press the Wi-Fi switch to re-enable the hotspot.

Once the hotspot is active, follow the instructions below to connect your smartphone to the device and access the configuration page.


Warning:

The dash camera can be connected to only one smartphone at a time. Connecting multiple devices simultaneously may cause communication errors or configuration failures. For the best user experience, an Android smartphone is recommended.

Step1: Select the Wi-Fi named with model + IMEI number and connect it with default password: “12345678”

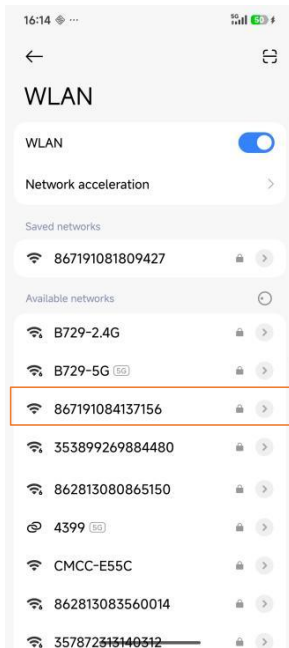


Step 2: Open this link <http://192.168.169.1> in the phone web browser

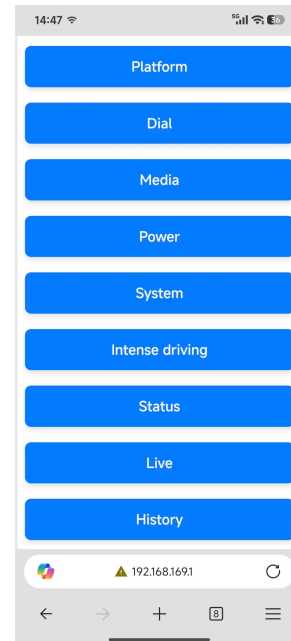


5.2 Platform Server

Step 1. Please select platform menu to modify the platform server settings.

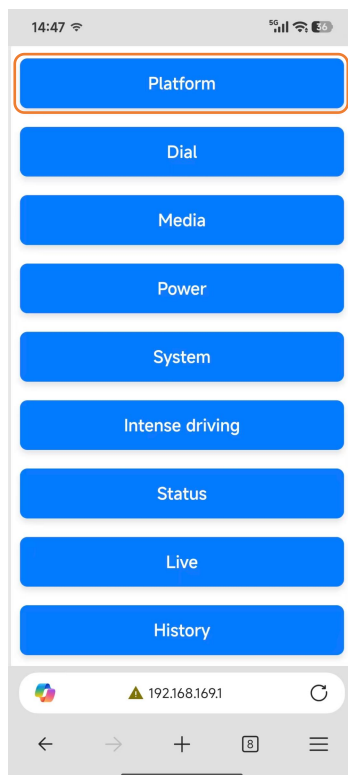

Step 2. Input the server address (IP or domain name), port, protocol

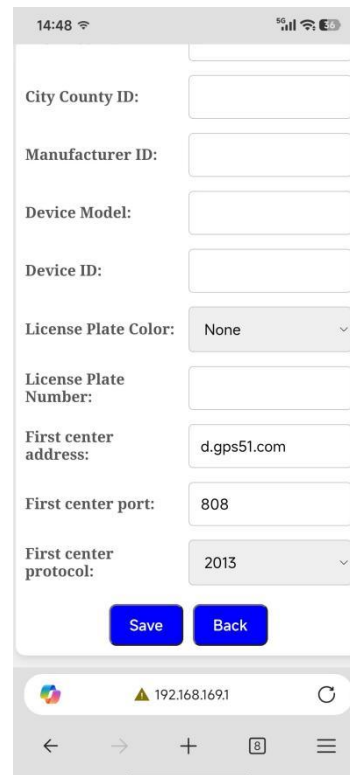

Note: Device ID Reporting Rules

The device use the JT/T 808 protocol and the reported device ID varies depending on the selected protocol version:

- JT/T 808-2013: The device reports the last 12 digits of the IMEI as the device ID by default.
- JT/T 808-2019: The device reports the full 15 digits IMEI number as the device ID by default.

When configuring the platform connection, simply select the appropriate JT/T 808 protocol version (2013 or 2019) according to the platform requirements. This setting only determines the version of the JT/T 808 protocol used for communication.

6. Firmware Upgrade

The device supports the following firmware upgrade methods:

Method 1: Local Upgrade via MicroSD Card

- Obtain the latest firmware package provided us.
- Copy the firmware file to the root directory of the MicroSD card.
- Insert the MicroSD card into the device.
- Power on the device. The firmware upgrade will start automatically.

Method 2: Remote Upgrade via FTP

The device also supports remote firmware upgrades over a network connection (Wi-Fi or cellular network).

Send an FTP upgrade command to the device, which will download the latest firmware package from the specified FTP server and perform the upgrade automatically.

For the command format and configuration details, please refer to the Device Command List.

7. Usage Precautions

7.1 Safety Warning

The driver remains fully responsible for the safe operation of the vehicle.

For safe operation:

- Do not review recorded videos, access the platform, or modify device settings while driving.
- Perform device configuration, maintenance, and video review only when the vehicle is safely parked and in compliance with local laws and regulations.
- Always maintain full attention on the road and surrounding traffic conditions.
- Do not allow mobile phones, tablets, or other devices used to access the platform to distract the driver.

Installation Safety Requirements

When installing the device, ensure that it:

- Does not obstruct the driver's field of view.
- Does not interfere with vehicle controls, including the steering wheel, pedals, gear selector, or other operating components.
- Is securely mounted and properly fastened.
- Is not installed in front of or within the deployment area of any airbag.

Regulatory Compliance

Some countries and regions prohibit or restrict the use of video monitoring and recording devices in vehicles. Users are responsible for ensuring that the installation and use of this product comply with all applicable local laws and regulations.

7.2 Maintenance Precautions

1. Keep the device dry at all times. Do not expose the device, cables, or connectors to water, moisture, or high-humidity environments. Do not handle the device with wet hands, as this may result in short circuits, corrosion, equipment failure, or electric shock.
2. Avoid strong impacts, excessive vibration, or mechanical shock, as these may affect device performance or cause hardware damage.
3. Do not expose the device or power supply to extreme temperatures. Operating or storing the equipment outside the specified temperature range may result in malfunction or reduced service life.
4. Do not strike, throw, puncture, drop, crush, or otherwise subject the device to physical abuse.
5. Use only power cables, accessories, and data cables approved or supplied by the manufacturer. The use of incompatible accessories may affect performance, safety, or product reliability.
6. Do not disassemble, modify, or repair the device or its accessories without authorization. Unauthorized modifications may cause equipment failure and will void the product warranty.

7.3 Troubleshooting

Problem	Possible Cause / Solution
1. No video recording / recording invalid	Ensure a compatible MicroSD card is installed. The card must be formatted as FAT32 and meet the minimum requirement of Class 10 (C10) or higher.
2. Loop recording not working	Check available storage space on the memory card. If the card is full or abnormal, back up important files and format the card.
3. Video is blurry or unclear	Remove the protective film from the camera lens. Clean both the lens and the windshield to ensure proper image clarity.
4. No audio in recordings	Verify that audio recording is enabled in the device or platform settings.
5. Memory card not readable / files cannot be played	Confirm the memory card is properly inserted and formatted as FAT32. Test the card on a computer. If playback still fails, use a different video player or replace the memory card if it is damaged.

6. Device does not power on (no LED indicators)	Check vehicle ignition (ACC status). Ensure B+, ACC, and GND connections are correct. Inspect the fuse and wiring for damage or loose connections.
7. Device cannot connect to network (SIM issue / blue indicator flashing)	Verify SIM card is correctly installed and has an active data plan. For IoT SIM cards, APN configuration may be required manually.
8. No GNSS positioning (green indicator flashing)	Move the vehicle to an open area with a clear sky view. GNSS signal may be weak or unavailable in tunnels, underground parking, or between tall buildings.
9. Camera angle becomes loose after adjustment	Ensure mounting screws at the camera joint are properly tightened after adjusting the angle.
10. Mount base falls off windshield	Ensure the installation surface is clean and free of dust, grease, or moisture before applying the 3M adhesive. Apply firm pressure during installation for proper adhesion.
11. Other issues	Restore factory settings and reconfigure the device. If the issue persists, contact technical support or your local distributor.

8. After-Sales Service Policy

Important Notice

To support continuous product improvement, specifications, features, software, and hardware may be updated without prior notice. The appearance, color, and configuration of the product are subject to the actual product delivered.

This warranty applies to the repair, replacement, or return of products identified by their unique IMEI number. Please keep the original proof of purchase in a safe place, as they may be required when requesting warranty service.

Warranty Coverage

For defects caused by non-human factors under normal use conditions, the product is covered by a one-year limited warranty from the date of purchase.

Warranty Exclusions

Repair services may be provided on a chargeable basis under any of the following circumstances:

1. The warranty period has expired.
2. The warranty card, proof of purchase, or other valid purchase documentation cannot be provided.
3. The product or its accessories are outside the applicable warranty period.
4. Damage caused by unauthorized repair, modification, disassembly, misuse, accident, impact, liquid ingress, improper installation, or incorrect power supply voltage.
5. The product label, serial number, IMEI, or anti-counterfeit label has been removed, altered, damaged, or is illegible.

6. Damage resulting from installation, operation, or maintenance that does not comply with the instructions in this manual.
7. Damage caused by force majeure events, including but not limited to fire, flood, lightning, earthquake, or other natural disasters.
8. The product model does not match the information recorded on the warranty documentation, or the warranty documentation has been altered.
9. Any other damage resulting from circumstances beyond the manufacturer's reasonable control.